

QuickLink[⚡] Low Voltage System



seleCCTable[®]
colors
2700K • 3000K • 3500K
4000K • 5000K

DIMMABLE

Why wire multiple driver boxes when you only need to wire one?

Power multiple canless QuickLink lights on the single remote power supply. Begin with a Starter Kit – a remote power supply, low voltage cable, and multiple canless downlights - then add fixtures as needed to complete the project.



Power fixtures in seconds with QuickLink Twist Connectors!



SAVE UP TO 85% IN WIRING TIME

QuickLink Versions

Kits include 1 Remote Power Supply, Low Voltage Cable, & Multiple Fixtures

[LEARN MORE](#)

Phase Cut

[LEARN MORE](#)

0-10V

HLBQL Slim Canless LED Downlights
Multi-Pack Starter Kits + Additional Fixtures
4", 6" • Round • Phase Cut or 0-10V



[LEARN MORE](#)

LTQL-DM Regressed Canless LED Downlights
Multi-Pack Starter Kits + Additional Fixtures
4", 6" • Round • Phase Cut



[LEARN MORE](#)

RLQL-DM Regressed Canless LED Downlights
Multi-Pack Starter Kits + Additional Fixtures
4", 6" • Round • Phase Cut or 0-10V



2 in 1 installation

5
seleCCTable[®]
colors

selectable lumens

dim-to-warm
option included

[LEARN MORE](#)

HLBC Slim Regressed Comfort 2-in-1 LED Downlights

- **Versions:** Slim 4" & 6" round fixtures, Canless or 2-in-1 Canless-to-Can mounting
- **2-in-1 Version:** Installs anywhere as a slim 1/2"-thin canless downlight or converts to fit a recessed housing
- **6-position Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K + D2W (Dim-to-Warm means lights will warm in tone as light dims (3000K-to-1800K) just like traditional incandescent bulbs.)
- **Lumen Select:** 4"-600/900 lms; 6"-900/1100 lms
- **Dimming:** 5% Dimming (Phase Cut LE/TE or 0-10V)
- **Specs:** 50,000 hrs • 90+ CRI • 120V or 120-277V
- **Optics:** Regressed prismatic lens provides superior glare reduction and visual comfort
- **Certifications:** ENERGY STAR[®], Air-Tite, IC rated, and wet location listed for showers or covered outdoor locations, 5-year Warranty
- **Included (2-in-1):** LED Fixture, E26 medium socket adapter & mounting hardware (4"-friction blades; 6"-torsion springs)
- **Accessories:** Round and square decorative overlays, mounting frames, and extension cables (sold separately)



2 in 1 installation

5
seleCCTable[®]
colors

[LEARN MORE](#)

CJB Slim Integrated JBox 2-in-1 LED Downlights

- **Versions:** Slim 4" & 6" round Canless or 2-in-1 Canless-to-Can mounting
- **2-in-1 Version:** Installs anywhere as a slim 1/2"-thin canless downlight or can convert to fit 4" or 6" recessed housings
- **5-position Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K
- **Brightness (Lumens):** 4"-600 lms; 6"-900 lms
- **Dimming:** Dims to 5% (Phase Cut LE/TE)
- **Specs:** 35,000 hrs • 90+ CRI • 120V input
- **Certifications:** ENERGY STAR[®], Air-Tite, IC rated, and wet location listed for showers or covered outdoor locations, 5-year Warranty
- **Included:** LED Fixture, E26 medium socket adapter & mounting hardware (4"-friction blades; 6"-torsion springs)
- **Accessories:** Mounting frames (sold separately)



RL Recessed LED Trims

- **Versions:** 3" 4", 5/6" round fixtures fit most standard recessed housings (includes E26 medium socket adapter)
- Baffled LED trim with curved regressed lens
- **6-position Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K + D2W (Dim-to-Warm means lights will warm in tone as light dims (3000K-to-1800K) just like traditional incandescent bulbs.)
- **Brightness (Lumens):** 3"-500 lms; 6"-600 lms
- **Lumen Select Versions:** 4"-600/900 lms; 6"-900/1200 lms
- **Dimming:** 5% Dimming (Phase Cut LE/TE or 0-10V)
- **Specs:** 70,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty
- **Accessories:** Decorative overlays (sold separately)



LEARN MORE



RL-DM Canless LED Downlights

- **Versions:** 4", 6" round fixtures with remote driver/ JBoxes. Mount directly to the ceiling, No-Housing Required.
- Baffled LED trim with curved regressed lens
- **6-position Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K + D2W (Dim-to-Warm means lights will warm in tone as light dims (3000K-to-1800K) just like traditional incandescent bulbs.)
- **Brightness (Lumens):** 6"-600 lms
- **Lumen Select Versions:** 4"-600/900 lms; 6"-900/1200 lms
- **Dimming:** 5% Dimming (Phase Cut LE/TE or 0-10V)
- **Specs:** 70,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty
- **Accessories:** Decorative overlays, mounting frames and extension cables (sold separately)



LEARN MORE



LT Recessed LED Trims

- **Versions:** 4", 5/6" round fixtures fit most standard recessed housings (includes E26 medium socket adapter)
- Baffled LED trim with flat regressed lens
- **5-position Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K
- **Brightness (Lumens):** 4"-600 lms; 6"-600 lms
- **Dimming:** 10% Dimming (Phase Cut LE/TE)
- **Specs:** 35,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty



LEARN MORE



RA Baffle Adjustable Recessed LED Trims

- **Versions:** 4", 5/6" round fixtures fit most standard recessed housings (includes E26 medium socket adapter)
- Adjustable gimbal tilts up to 35° and rotates 360° to aim light where it's needed
- **6-position Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K + D2W (Dim-to-Warm means lights will warm in tone as light dims (3000K-to-1800K) just like traditional incandescent bulbs.)
- **Lumen Select Versions:** 4"-600/900 lms; 6"-600/1000 lms
- **Dimming:** 5% Dimming (Phase Cut LE/TE or 0-10V)
- **Specs:** 50,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, IC rated, and damp location listed, 5-year Warranty



LEARN MORE



RA-DM Baffle Adjustable Canless LED Downlights

- **Versions:** 4", 6" round fixtures with remote driver/ JBoxes. Mount directly to the ceiling, No-Housing Required.
- Adjustable gimbal tilts up to 35° and rotates 360° to aim light where it's needed
- **6-position Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K + D2W (Dim-to-Warm means lights will warm in tone as light dims (3000K-to-1800K) just like traditional incandescent bulbs.)
- **Lumen Select Versions:** 4"-600/900 lms; 6"-600/900 lms
- **Dimming:** 5% Dimming (Phase Cut LE/TE or 0-10V)
- **Specs:** 50,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, IC rated, and damp location listed, 5-year Warranty
- **Accessories:** Mounting frames and extension cables (sold separately)



LEARN MORE



JBD Slim Surface Mount LED Downlight

- **Versions:** 4", round fixture installs in many standard 4" junction boxes
- Interchangeable round, square, and full-lensed designer trims in multiple finishes
- **5-position Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K
- **Brightness (Lumens):** 4"-700 lms
- **Dimming:** 5% Dimming (Phase Cut LE/TE)
- **Specs:** 50,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty



LEARN MORE



ML4 Modular LED Downlighting

- **Versions:** 4" round fixtures in either Canless or Recessed LED Trim Modules. Downlight or Wall Wash distributions available.
- **5-position Field-SeleCCTable Version:** 2700K, 3000K, 3500K, 4000K, 5000K
- **2-Position Dim-to-Warm Switch:** Select 3000K or 2700K and light dims to 1800K
- **Lumen Select Versions:** 600/800/1000 lms; 650 lms (D2W), 600 lms (95+ CRI)
- **Dimming:** Down to 5% in either 120V phase cut (LE/TE) or standard 0-10V (120-277V)
- **Optics:** Interchangeable 25°, 40°, 55°, or 25° asymmetric wall wash TIR optics
- **Trims:** 3-1/2" conical reflector or 2" lensed/lens-less pinhole trims in round or square with multiple finishes + wall wash trims
- **Specs:** 50,000 hrs • 90+ or 95+ CRI • 120V or 120-277V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty
- **Accessories:** Mounting frames and extension cables (sold separately)



LEARN MORE



ML56 Modular LED Downlighting

- **Versions:** 5/6" round downlighting system of LED modules, optics, and trims fit in most 5" or 6" recessed housings
- **5-position Field-SeleCCTable Version:** 2700K, 3000K, 3500K, 4000K, 5000K
- **2-Position Dim-to-Warm Switch:** Select 3000K or 2700K and light dims to 1800K
- **Lumen Select Versions:** 650/900/1100 lms; 650 lms (D2W); 450/650/900 lms (97+ CRI)
- **Dimming:** Down to 5% in either 120V phase cut (LE/TE) or standard 0-10V (120-277V)
- **Optics:** Interchangeable 25°, 40°, 55° and 75° field installable optics TIR optics
- **Trims:** Polymer baffle, reflector, baffle, gimbal, & shallow baffle
- **Specs:** 50,000 hrs • 90+ or 97+ CRI • 120V or 120-277V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty
- **Accessories:** Wall wash lens fits in any trim option



LEARN MORE



HLBE Slim Lite Canless LED Downlight Bulk Packs

- **Versions:** Slim (1/2"-thin) 4" & 6" round fixture with remote driver/JBox. Mount directly to the ceiling, No-Housing Required.
- Slim fixture fits under any obstruction at only 1/2" and installs in 2x2 plenum space
- Dedicated 3000K soft white color temperature
- **Brightness (Lumens):** 4"-600 lms; 6"-900 lms
- **Dimming:** 10% Dimming (Phase Cut LE/TE)
- **Specs:** 35,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty
- **Accessories:** Mounting brackets, mounting frames, decorative overlays, and extension cables (sold separately)



LEARN MORE



RL & RL-DM Night Light Downlighting

- **Versions:** Round fixtures in 4" & 6" Canless LED Downlights or 4" and 5/6" Recessed LED Trims
- **2 Lighting Modes:** Center Downlight mode and outer trim ring Night Light mode
- **Downlight Mode in 6-position Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K + D2W (Dim-to-Warm means lights will warm in tone as light dims (3000K-to-1800K) just like traditional incandescent bulbs.)
- **Night Light Mode:** Warm gentle glow (2000K) illuminates the acrylic trim
- **Brightness (Lumens):** Canless 4"-700 lms; 5/6"-1000 lms;
- **Dimming:** 5% Dimming (Phase Cut LE/TE)
- **Specs:** 50,000 hrs • 90+ CRI • 120-277V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty
- **Accessories:** Mounting frames and extension cables (sold separately)






LEARN MORE

LEARN MORE

LED Trim

Canless

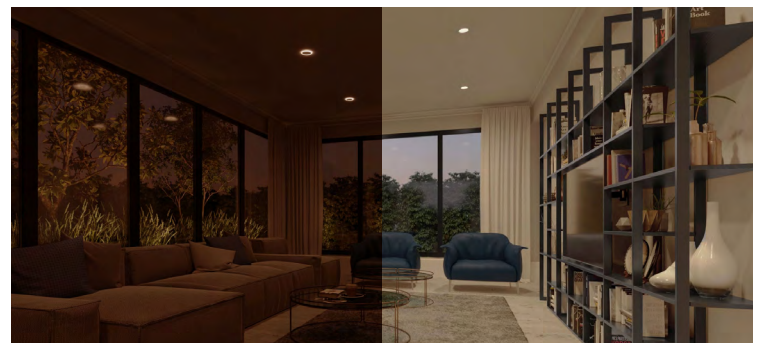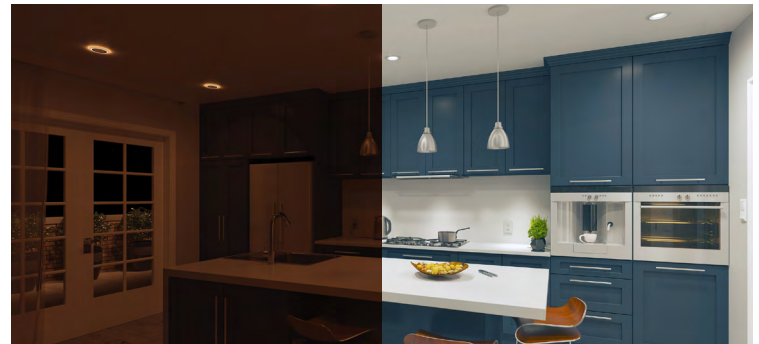

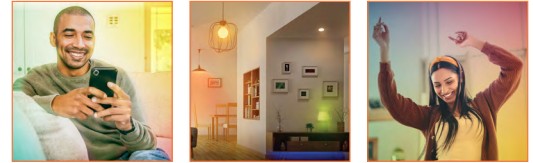

Effortless Smart Lighting for Everyday Living

Illuminate spaces with the perfect lighting. Set the mood with 16 million colors + tunable whites all from the WiZ app or your preferred compatible voice assistant.



LEARN MORE

HLB Smart Wi-Fi® Slim Canless LED Downlights Connected by WiZ Pro

- **Versions:** Slim (½"-thin) 4" & 6" round fixtures with remote driver/JBoxes. Mount directly to the ceiling, No-Housing Required.
- Smart Wi-Fi® lighting provides tunable whites + 16 million colors
- Set schedules, scenes, and automations like SpaceSense motion detecting all from the WiZ app.
- WiZclick feature accesses 2 lighting modes using a standard ON/OFF switch. (Not compatible with standard dimmers.)
- **Brightness (Lumens):** 4"-600 lms; 6"-900 lms
- **Dimming:** 5% Wireless Smart Dimming
- **Specs:** 50,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty
- **Accessories:** Mounting frames, decorative overlays, and extension cables (sold separately)



LEARN MORE

RL Smart Wi-Fi® Recessed LED Trims Connected by WiZ Pro


- **Versions:** 4" & 6" round fixtures fit most standard recessed housings (includes E26 medium socket adapter)
- Smart Wi-Fi® lighting provides tunable whites + 16 million colors
- Set schedules, scenes, and automations like SpaceSense motion detecting all from the WiZ app.
- WiZclick feature accesses 2 lighting modes using a standard ON/OFF switch. (Not compatible with standard dimmers.)
- **Brightness (Lumens):** 4"-600 lms; 6"-600 lms
- **Dimming:** 5% Wireless Smart Dimming
- **Specs:** 70,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty
- **Accessories:** Decorative overlays (sold separately)



LEARN MORE

ESF Smart Wi-Fi® LED Floodlights Connected by WiZ Pro

- **Versions:** Minimal design with sleek lens design. Available in White and Black finish. Wall or eave mounted to recessed or surface junction boxes.
- Smart Wi-Fi® lighting provides tunable whites + 16 million colors
- Set schedules, scenes, and automations all from the WiZ app.
- WiZclick feature accesses 2 lighting modes using a standard ON/OFF switch. (Not compatible with standard dimmers.)
- **Brightness (Lumens):** 2200 lms
- **Dimming:** 5% Wireless Smart Dimming
- **Specs:** 50,000 hrs • 80+ CRI • 120V
- **Certifications:** UL certified for US and Canada for wet locations, 5-year Warranty

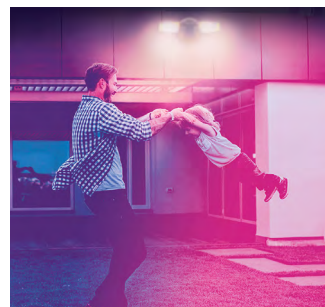



FM Flush Mount

- **Versions:** 8", 11", & 15" flush mount
- Mounts to most 3-1/2" & 4" junction boxes from below the ceiling
- **Field-SeleCCTable Switch:** 8"-3CCT 30-40-5000K; 11" & 15"-5CCT 27-30-35-40-5000K
- **Brightness (Lumens):** 8"-900 lms; 11"-1200 lms; 15"-1500 lms
- **Dimming:** 10% Dimming (Phase Cut LE/TE)
- **Specs:** 50,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and damp location listed, 5-year Warranty



LEARN MORE



HLS Surface Mount LED Disk Lights

- **Versions:** 4", 6", 9", and 9" w/ motion sensor wet-rated surface mount downlight
- Low profile surface or wall mount disk light
- Mounts to most 3-1/2" & 4" junction boxes from below the ceiling – no clips or plates required
- Dedicated 3000K, 4000K, & 5000K color temperatures
- **Brightness (Lumens):** 4"-700 lms; 6"-900 lms; 9"-1200 lms
- **Dimming:** 10% Dimming (Phase Cut LE/TE)
- **Specs:** 50,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, Air-tite, IC-rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty

LEARN MORE



HLCE Surface Mount LED Disk Light Bulk Packs

- **Versions:** 4", 6" damp-rated surface mount downlight
- Low profile surface or wall mount disk light
- Mounts to most 3-1/2" & 4" junction boxes from below the ceiling – no clips or plates required
- Dedicated 3000K soft white color temperature
- **Brightness (Lumens):** 4"-700 lms; 6"-900 lms
- **Dimming:** 10% Dimming (Phase Cut LE/TE)
- **Specs:** 50,000 hrs • 90+ CRI • 120V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty



LEARN MORE



RLS Slope Recessed Baffle Canless LED Downlights

- **Versions:** Slope 4" & 6" round, Canless LED Downlights remote driver/JBox
- Adjusts from 9° to 45° to match virtually any ceiling pitch
- **5-position Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K
- **Brightness (Lumens):** 4"-1000 lms; 6"-1600 lms
- **Dimming:** Dims to 5% (Phase Cut LE/TE)
- **Specs:** 50,000 hrs • 90+ CRI • 120V input
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed for showers or covered outdoor locations, 5-year Warranty
- **Accessories:** Mounting frames (sold separately)



LEARN MORE



LCR Light Commercial Canless LED Downlights

- **Versions:** 2", 4", 6", & 8" round fixture with remote driver/JBox. Mount directly to the ceiling, No-Housing Required.
- Smooth splay trim with regressed flat diffuse lens
- **6-position Field-SeleCCTable:** 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
- **Options:** Wall Wash (4" & 6"); Emergency Battery Backup (4", 6", & 8")
- **Brightness (Lumens):** Options from 800-8000 lms
- **Dimming:** 5% Dual Dimming (Phase Cut LE/TE and 0-10V)
- **Specs:** 50,000 hrs • 90+ CRI • 120-277V
- **Certifications:** ENERGY STAR®, Air-Tite, IC rated, and wet location listed (showers / covered outdoor locations), 5-year Warranty
- **Accessories:** Mounting frames, smooth and baffle decorative overlays in multiple finishes, and extension cables (sold separately)



LEARN MORE



Canless New Construction Integrated Drywall Collar Mounting Frames

- **Versions:** 4" & 6" sizes to be used with round canless LED downlights
- The 1/2" integrated drywall collar makes it easy to locate the hole and cut drywall from below the ceiling.
- Reserve the fixture's location in the ceiling with 8" to 24" wide screw-locking hanger bars.
- Captive integrated thumbscrews hold HALO canless junction boxes to the frame during the rough-in phase.
- Use to meet local code requirements where canless fixtures need to be supported by building structure.



LEARN MORE